

Webpliance Dual-Lens Mini PTZ



Webpliance Full HD 1080p 2MP Light Hunter Dual-Lens Mini PTZ IP Security Camera with a 2.8mm Fixed Lens on Top

From PTZ presets and patrols, to autotracking, to human body & vehicle detection, to crisp and clear two-way audio, to 164' IR distance, to Light Hunter technology, these cameras are packed with incredible specs and features to complete any video surveillance system, whether it's for your home or business.

HD Resolution: **2MP**

Fixed Lens: **2.8mm**

Weatherproof Rating: **IP66**


Night Vision IR Range: **Up to 30ft**

- Fixed camera and PTZ camera integration, dual channels with one IP, look at overall situation and consider details at the same time.
- High quality image with 2MP, 1/2.8" CMOS sensor
- 1920*1080@25fps in the main stream

- Ultra 265, H.265, H.264, MJPEG
- 4X optical zoom of PTZ channel allows for closer viewing of subjects.
- Light Hunter technology ensures ultra-high image quality in low illumination environment.
- Up to 120 dB Optical WDR (Wide Dynamic Range)
- Built-in 2*mic & high-power speaker, support two-way audio, has better sound performance.
- Support ceiling mount and wall mount
- IR & warm light illumination to deal with different scenes and achieve full color illumination
- DC12V or PoE+(IEEE 802.3at) power supply


FEATURES

*Please note: the following specs are true for the **fixed lens panoramic camera** and not necessarily for the PTZ.*

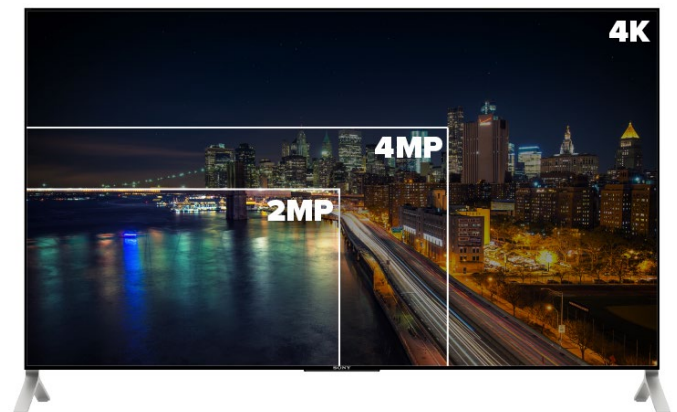

2MP HD RESOLUTION

The IPC9312LFW-AF28-2X4 captures video up to a resolution of **2MP @ 25 FPS**, which is 1920X1080 pixels. Every pixel added to your camera's picture gives you a higher image quality and more detail. So at 2MP, you're going to get a crisper, cleaner, and more detailed image.

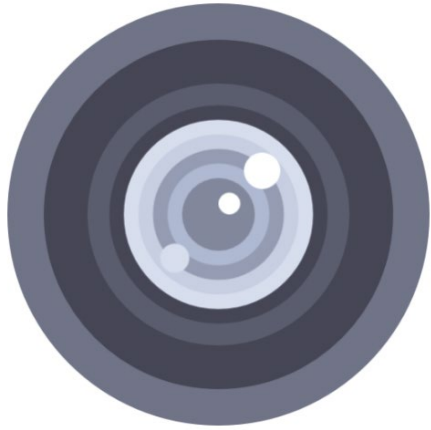

2.8MM FIXED LENS


The IPC9312LFW-AF28-2X4 has a **2.8mm Fixed Lens**. That means it's fixed at one length; it can't optically zoom in and out. The longer the focal length on a fixed lens camera, the more zoomed in it is and the more close-up detail you'll be able to see. But the shorter the focal length, the wider the field of view and the more area your surveillance will cover.

The IPC9312LFW-AF28-2X4 has a horizontal field of view of **102.4°**.



2-WAY AUDIO

The IPC9312LFW-AF28-2X4 has a built-in microphone and speaker enabling you to easily communicate with family members, pets, coworkers, or even intruders. The crisp, clear 2-way audio makes this camera perfect for access points to your home or business, baby or pet monitors, and so much more!

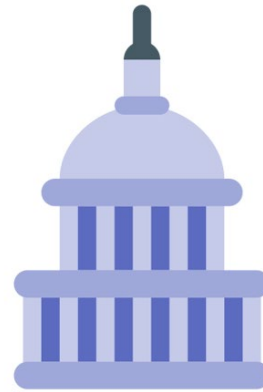

NDAA COMPLIANT

This model is compliant with the NDAA (National Defense Authorization Act), meaning it's safe to use and install on U.S. government properties. It was constructed with trusted and reliable technology at its core.



IP66 WEATHERPROOF RATING

This camera has an Ingress Protection (IP) rating of 66. This means the camera is completely protected from dust and other solid particles (the first six). It can also withstand powerful streams of water jets from any direction (the second six).

Rest assured that when you install your camera outside, it will have no problem braving the toughest of storms.




UP TO 30FT NIGHT VISION IR RANGE

When the sun goes down or the lights go out, this camera switches on its own onboard infrared LED lights. These lights, which are invisible to the human eye, allow the camera to continue functioning and recording video 24/7, day or night. And since its IR range covers up to 30ft, you're not going to miss anything that happens on your camera's feeds, even if it happens in pitch-black darkness.



REMOTE ACCESS

The IPC9312LFW-AF28-2X4 is a part of our Webpliance line of products. As such, it's packed with features that would please a power user, yet it's simple enough to operate for a novice. Easily view and manage your cameras and recorders anywhere in the world with the free mobile and desktop applications. For the power user, these apps give you the power to adjust advanced settings on the fly. For the novice, you can use the apps to simply view live feeds and play back recorded video. Whatever you need to accomplish, it's all right there at your fingertips.

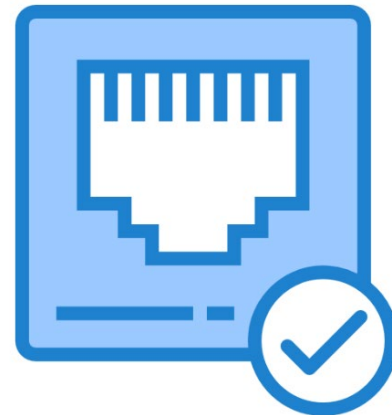

PLUG & PLAY

If you're creating a new system out of our Webpliance cameras, set up is insanely easy with our Webpliance line of POE NVRs. Simply plug the camera into the back of the Webpliance NVR and you have instant video on the recorder's HDMI interface. You can also view and manage the NVR through free desktop and mobile apps.



ONVIF COMPATIBILITY

If you want to add this camera to a security system already set up, that's no problem. This camera complies with the protocols set by the Open Network Video Interface Forum (ONVIF). This means, as long as your current recorder is ONVIF compatible, you'll be able to set this camera up with your current system.

SPECIFICATIONS

Camera Type	IP
-------------	----

Form Factor	PTZ
-------------	-----

Resolution	2MP
------------	-----

Max Resolution	1920 X 1080
----------------	-------------

Frames Per Second	25 FPS
-------------------	--------

Image Sensor	2MP,1/2.8" CMOS sensor
--------------	------------------------

Lens Type	Fixed Lens
-----------	------------

Focal Length	2.8mm
--------------	-------

Field of View	102.4°
---------------	--------

Illumination	Infrared
--------------	----------

IR Range	Up to 30ft
----------	------------

Video Compression	Ultra H.265, H.265, H.264
-------------------	---------------------------

Max Video Bitrate	16Mbps
-------------------	--------

Weatherproof Rating	IP66
---------------------	------

Audio	2-Way Audio
-------	-------------

SPECIFICATIONS

Onvif Compatible	Yes
------------------	-----

Intelligent Events	Cross Line Detection, Area Entrance Detection, Area Exit Detection, Intrusion Detection, Master-Slave Linkage
--------------------	---

Artificial Intelligence	No
-------------------------	----

Onboard Storage	Up to 256GB
-----------------	-------------

Power Supply	DC12V, POE+
--------------	-------------

Power Consumption	MAX 16W
-------------------	---------

Operating Temperature	-4°F ~ 140°F
-----------------------	--------------

Weight	2.27lbs
--------	---------